


RUBBER DESIGN STAIR TREAD SYSTEMS


No. 620D

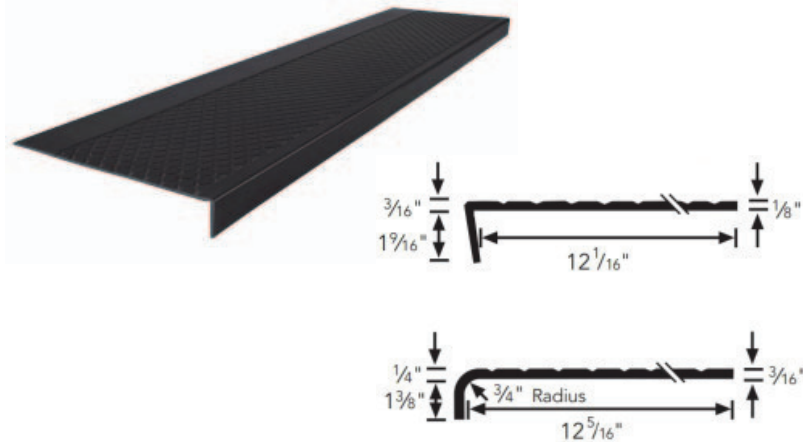

A raised diamond pattern rubber stair tread for use in commercial, industrial or institutional buildings. The diamond design surface is 8-1/4" deep with a 3" smooth back. Install with Musson RCM510 Acrylic Adhesive, No. 400 Neoprene Contact Adhesive, or No. 300 Water-Based Contact Adhesive. No. 620D treads are available in either square nose or curve nose design; square nose treads are 12-1/16" deep with a 1-9/16" long nose and curve nose treads are 12-5/16" deep with a 1-3/8" long nose.

Select from standard lengths of 36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102" or 108"; treads over 72" long are available in square nose only. Choose from standard marbled and solid colors as shown on page 3. No. 620D treads are available with 2-3/4" abrasive strips (No. GS620D) or a single 2" abrasive strip (No. GS620DVI); abrasive strips are available in Black (standard), Safety Yellow, Beige, Gray or Brown.


No. 780R

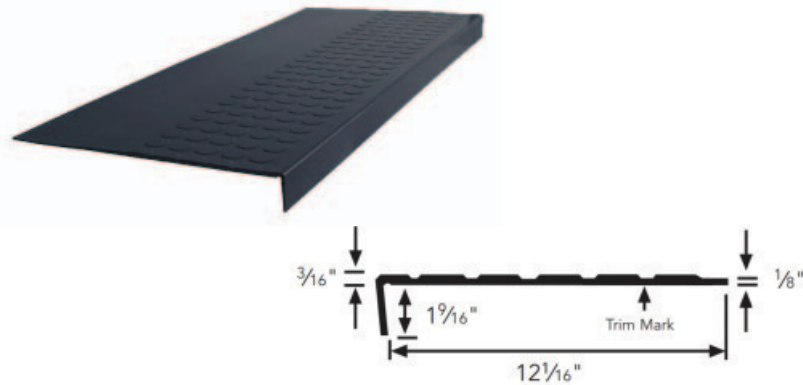

A high-profile pattern rubber stair tread for use in commercial, industrial or institutional buildings. The disc design surface is 7" deep with a 4-1/4" smooth back. Install with Musson RCM510 Acrylic Adhesive, No. 400 Neoprene Contact Adhesive, or No. 300 Water-Based Contact Adhesive. No. 780R treads are available in square nose only; treads are 12-1/16" deep with a 1-9/16" long nose.

Select from standard lengths of 36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102" or 108". Choose from standard marbled and solid colors as shown on page 3. No. 780R treads are available with 2-3/4" abrasive strips (No. GS780R) or a single 2" abrasive strip (No. GS780RVI); abrasive strips are available in Black (standard), Safety Yellow, Beige, Gray or Brown.


No. 820R

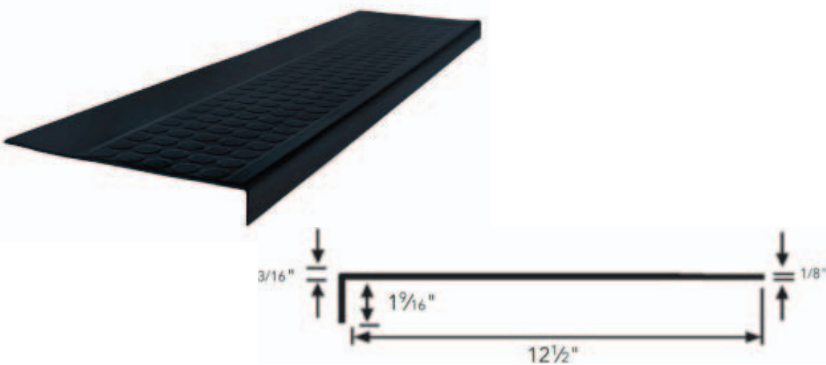

A low-profile pattern rubber stair tread for use in commercial, industrial or institutional buildings. The disc design surface is 7" deep with a 4-1/4" smooth back. Install with Musson RCM510 Acrylic Adhesive, No. 400 Neoprene Contact Adhesive, or No. 300 Water-Based Contact Adhesive. No. 820R treads are available in square nose only; treads are 12-1/2" deep with a 1-9/16" long nose.

Select from standard lengths of 36", 42", 48", 54", 60", 66", or 72". Choose from standard marbled and solid colors as shown on page 3. No. 820R treads are available with 2-3/4" abrasive strips (No. GS820R) or a single 2" abrasive strip (No. GS820RVI); abrasive strips are available in Black (standard), Safety Yellow, Beige, Gray or Brown.

No. 520S

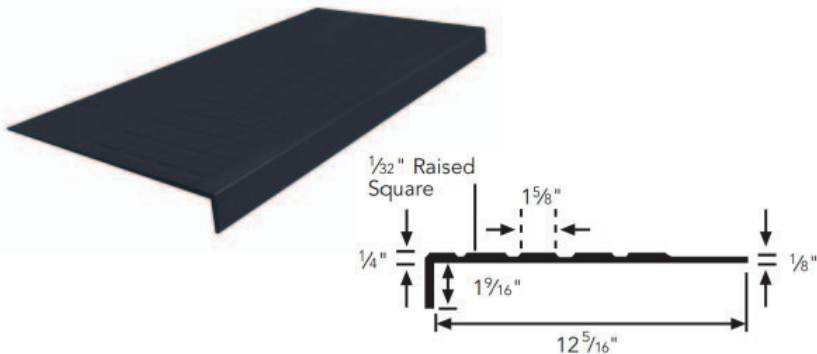


A raised square pattern rubber stair tread for use in commercial, industrial or institutional buildings. The square design surface is 7-3/4" deep with a 3-3/16" smooth back. Install with Musson RCM510 Acrylic Adhesive, No. 400 Neoprene Contact Adhesive, or No. 300 Water-Based Contact Adhesive. No. 520R treads are available in square nose only; treads are 12-5/16" deep with a 1-9/16" long nose.

Select from standard lengths of 36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102" or 108". Choose from standard marbled and solid colors as shown on page 3. No. 520S treads are available with 2-3/4" abrasive strips (No. GS520S) or a single 2" abrasive strip (No. GS520SVI); abrasive strips are available in Black (standard), Safety Yellow, Beige, Gray or Brown.

RUBBER DESIGN STAIR TREAD SYSTEMS


No. 1010R

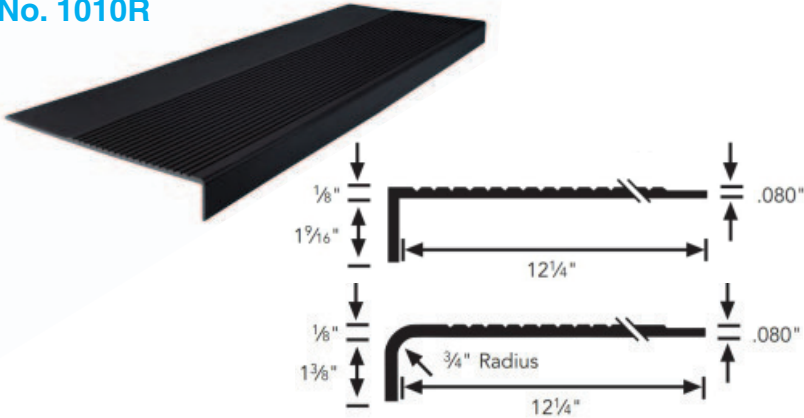

A raised-rib pattern rubber stair tread for light commercial use. The rib pattern surface is 6-3/4" deep with a 4-3/8" smooth back. Install with Musson RCM510 Acrylic Adhesive, No. 400 Neoprene Contact Adhesive, or No. 300 Water-Based Contact Adhesive. No. 1010R treads are available in square nose only; treads are 12-1/2" deep with a 1-9/16" long nose.

Select from standard lengths of 36", 42", 48", 54", 60", 66", or 72". Choose from standard marbled and solid colors as shown below.


No. 920R

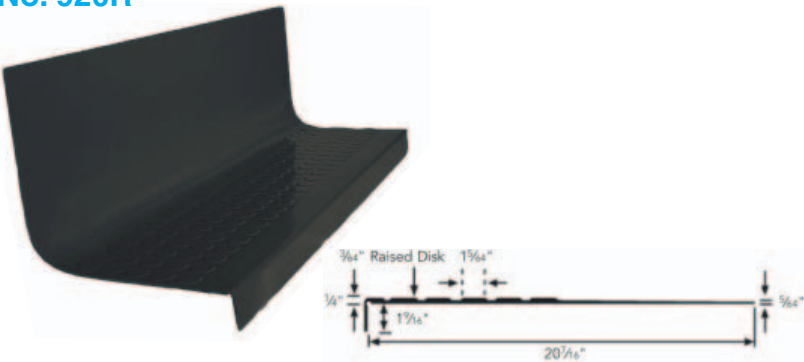

A high-profile pattern one-piece rubber stair tread/riser for use in commercial, industrial or institutional buildings. The disc design surface is 7" deep with a 12-1/2" smooth back/riser surface. Install with Musson RCM510 Acrylic Adhesive, No. 400 Neoprene Contact Adhesive, or No. 300 Water-Based Contact Adhesive. No. 920R treads are available in square nose only; treads are 12-1/16" deep with a 1-9/16" long nose.

Select from standard lengths of 36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102" or 108". Choose from standard marbled and solid colors as shown below. No. 920R treads are available with 2-3/4" abrasive strips (No. GS920R) or a single 2" abrasive strip (No. GS920RVI); abrasive strips are available in Black (standard), Safety Yellow, Beige, Gray or Brown.

No. 630D

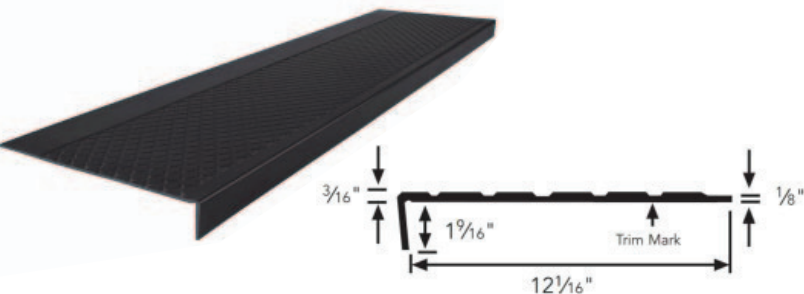


Our No. 630D Outdoor Rubber Stair treads are manufactured with a special compound for exterior applications. The raised diamond design surface is 8" deep with a 3" smooth back. Install with Musson No. 775 Epoxy Adhesive. No. 630D treads are available in square nose only; treads are 12" deep with a 1-9/16" long nose. No. 630D treads are the only rubber treads we recommend for exterior applications.


Select from standard lengths of 36", 42", 48", 54", 60", 66" or 72". Available in Plain Black only.

RUBBER TREADS, RISERS AND TILE COLOR CHART

Solid Colors

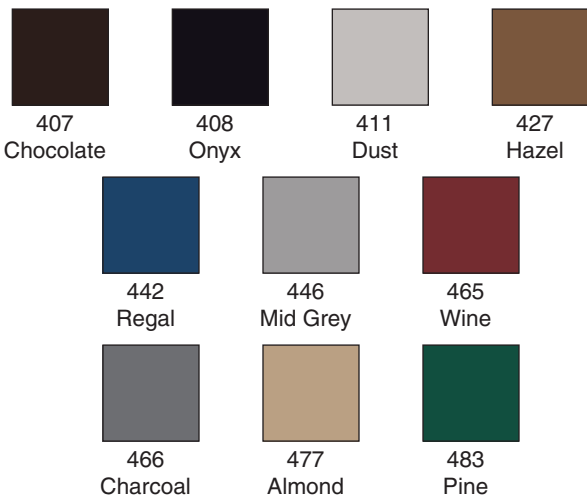


Marbled Colors

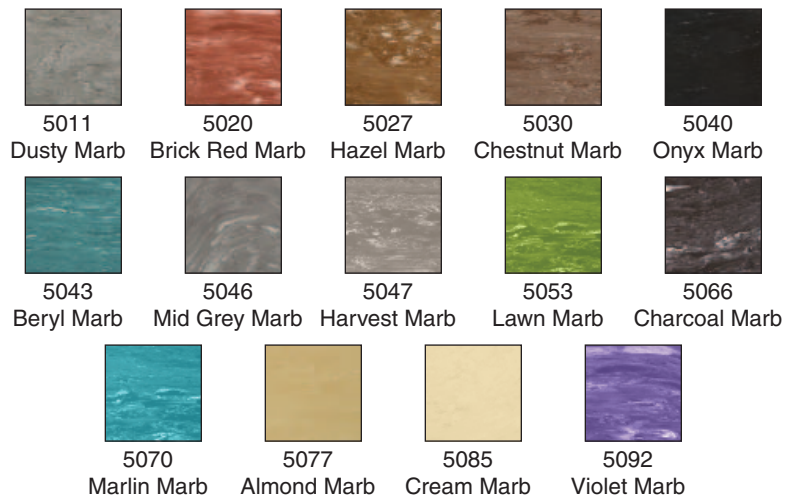

Product colors are reproduced as accurately as possible. Make final color selection from actual samples.

SMOOTH RUBBER TREADS • COVE RISERS • LANDING TILE

SMOOTH FLAT SURFACE TREADS

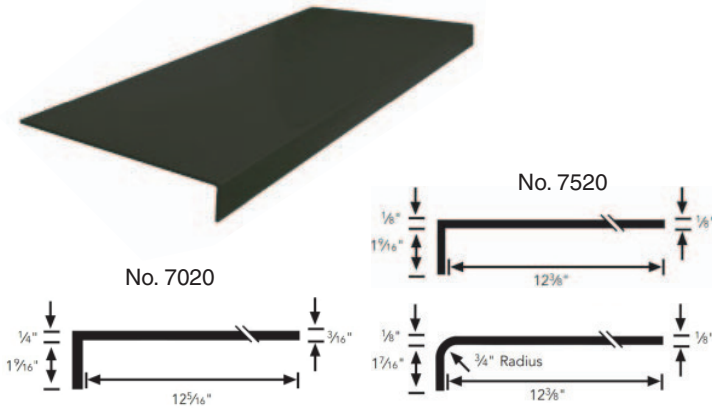

No. 7520 is a smooth rubber stair tread for light commercial use. No. 7520 is 12-3/8" deep with either a 1-9/16" long square nose or 1-7/16" long curve nose. No. 7520 treads are available with 2-3/4" abrasive strips (No. 220) or a single 2" abrasive strip (No. 2520VI); abrasive strips are available in Black (standard), Safety Yellow, Beige, Gray or Brown.

No. 7020 is a smooth rubber stair tread for use in commercial, industrial or institutional buildings. No. 7020 is 12-5/16" deep with a 1-9/16" long square nose only. No. 7020 treads are available with 2-3/4" abrasive strips (No. 2020) or a single 2" abrasive strip (No. 2020VI); abrasive strips are available in Black (standard), Safety Yellow, Beige, Gray or Brown.

Select from standard lengths of 36", 42", 48", 54", 60", 66" or 72" for both styles. Choose from standard marbled and solid colors as shown on page 3.

No. 605CR COVERED STAIR RISER



Complete the job by using our No. 605CR Cove Risers. Allows easier cleaning, is more attractive and reduces fitting procedures at the rear of the steps. Can be trimmed to fit in height and length.


Select from standard lengths of 36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102" or 108". Choose from standard marbled and solid colors as shown on page 3.

No. 644 DIAMOND DESIGN TILE (27" x 27")




An ideal tile for stair landings, lobbies, aisles, ramps, elevators, and entryways. Diamond design pattern matches diamond design treads in color and pattern. Tiles are 3/16" thick x 27" x 27". Choose from standard marbled and solid colors as shown on page 3.

No. 782 HI-PROFILE DISC TILE (19.68" x 19.68")



An ideal tile for stair landings, lobbies, aisles, ramps, elevators, and entryways. High-profile disc design pattern matches high-profile disc design treads in color and pattern. Tiles are 1/8" thick x 19.68" x 19.68". Choose from standard marbled and solid colors as shown on page 3.

No. 882 LOW-PROFILE DISC TILE (19.68" x 19.68")



An ideal tile for stair landings, lobbies, aisles, ramps, elevators, and entryways. Low-profile disc design pattern matches low-profile disc design treads in color and pattern. Tiles are 1/8" thick x 19.68" x 19.68". Choose from standard marbled and solid colors as shown on page 3.

No. 552 SQUARE DESIGN TILE (19.68" x 19.68")



An ideal tile for stair landings, lobbies, aisles, ramps, elevators, and entryways. Square design pattern matches square design treads in color and pattern. Tiles are 1/8" thick x 19.68" x 19.68". Choose from standard marbled and solid colors as shown on page 3.

No. 1001T SMOOTH TILE (12" x 12")



Top quality smooth rubber floor tile; offers the durable, resilient, long-wearing, easy maintenance of rubber flooring. Tiles are 1/8" thick x 12" x 12". Choose from standard marbled and solid colors as shown on page 3.

ADHESIVES

We carry a complete line of adhesives and nose caulks for installation of our stair treads, risers and tile.

Rubber and vinyl stair treads and cove risers can be installed with our No. RCM510 Acrylic Adhesive, No. 400 Neoprene Contact Adhesive or No. 300 Water-Based Contact Adhesive (No. 630D Rubber Outdoor Treads must be installed with our No. 775 Epoxy Adhesive). Landing tiles can be installed with our RCM510 Acrylic Adhesive or No. 775 Epoxy Adhesive.

Vinyl treads for commercial applications should also be installed using our No. 110 Epoxy Nose Caulk with our ECD18 or ECD26 Dual-Cartridge Dispenser.